HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 35mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 500MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material:Phosphor Bronze
Contact Plating:Au and Sn over Ni
Shell Material:Zinc Alloy
Shell Plating:Ni 100u"
Fixing Material:Phosphor Bronze
FIxing Plating:Sn over Ni
Housing Material:PBT+30%G.F(UL94V−0)
Cover Material:PBT+30%G.F(UL94V−0)

Ordering Information

6321- 0 XX R D SX M W A 02

- XX: No.of Pins — 14P 20P 26P 36P 50P
- SX: Contact Plating — S1=3u"Gold/Tin, S3=10u"Gold/Tin, S4=15u"Gold/Tin, S5=30u"Gold/Tin
- A: A=Tray

A2

42.00	30.48	35.40	46.50	52.40	50
33.11	21.59	26.51	37.61	43.51	36
26.76	15.24	20.16	31.26	37.16	26
22.95	11.43	16.35	27.45	33.35	20
19.14	7.62	12.54	23.64	29.54	14
DIM.J	DIM.K	DIM.H	DIM.G	DIM.F	PIN数

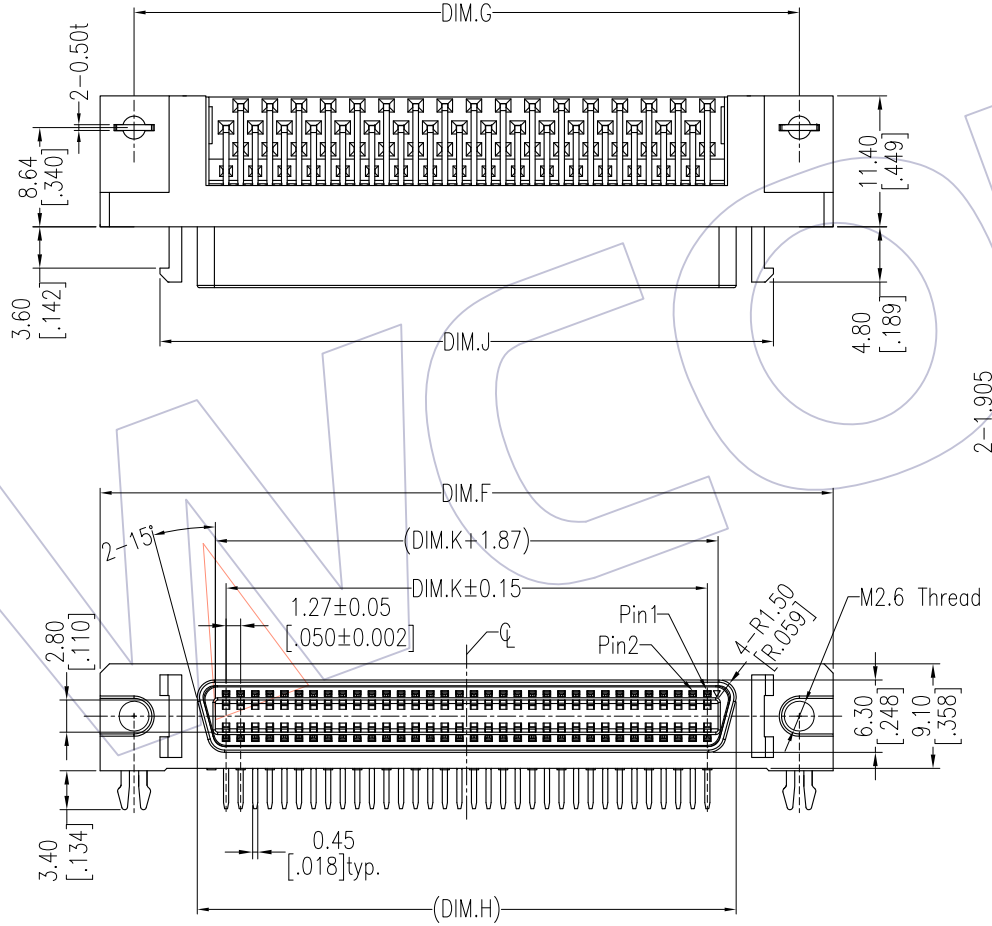

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

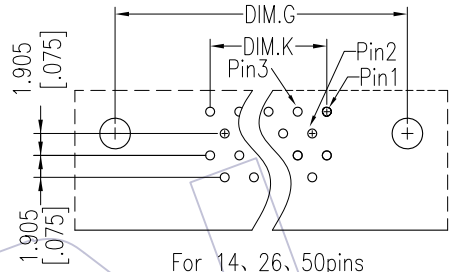

For 14、26、50pins

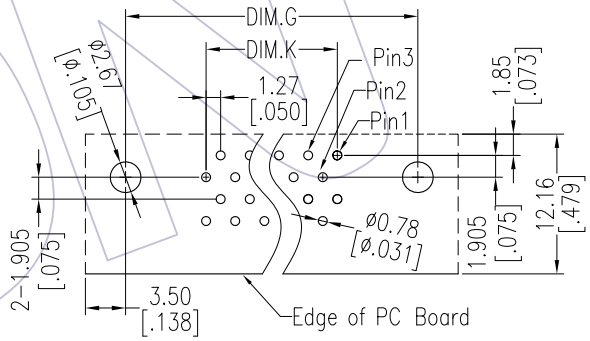

For 20、36pins

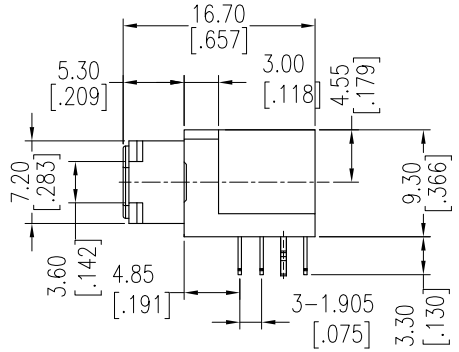

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2016/06/28	Move 68 PIN	
A1	2013/08/28	Modify DIM.H	------
A0	2013/08/20	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	JYHuang	2016/06/28
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/2
PROJ.	

PART NO. 6321-0XXRDSXMWA02

TITLE: 1.27PITCH CEN TYPE SCSI FEMALE DIP(鱼叉横向)

Customer NO.

WCON
Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshan
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: salesks@wcon.com