

HSF


NOTES:
 Current Rating:1AMP
 Contact Resistance:20mΩ max
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ min
 Operation Temperature:-40℃ to +105℃

Contact Material:Brass
 Contact plating:Au or Sn Over Ni
 Insulator Material:PA9T+33%GF(UL94V-0)
 6 To 8 Pin No "D" Configuration and CAP

Ordering Information

3131-XX M XX B D 00 T X

No. of Pins	Contact Plating	Color Insulator	Packing
10 34	G0=Gold Flash	B=Black	T=Tube
14 40	G3=10u"Gold		P=Tube+CAP
20 44	G4=15u"Gold		R=Tape&Reel+CAP
24 50	G5=30u"Gold		
26 60	S0=Gold Flash/Tin		
30 64	S3=10u"Gold/Tin		
32 80	S4=15u"Gold/Tin		
32 80	S5=30u"Gold/Tin		
100	SN=Tin		

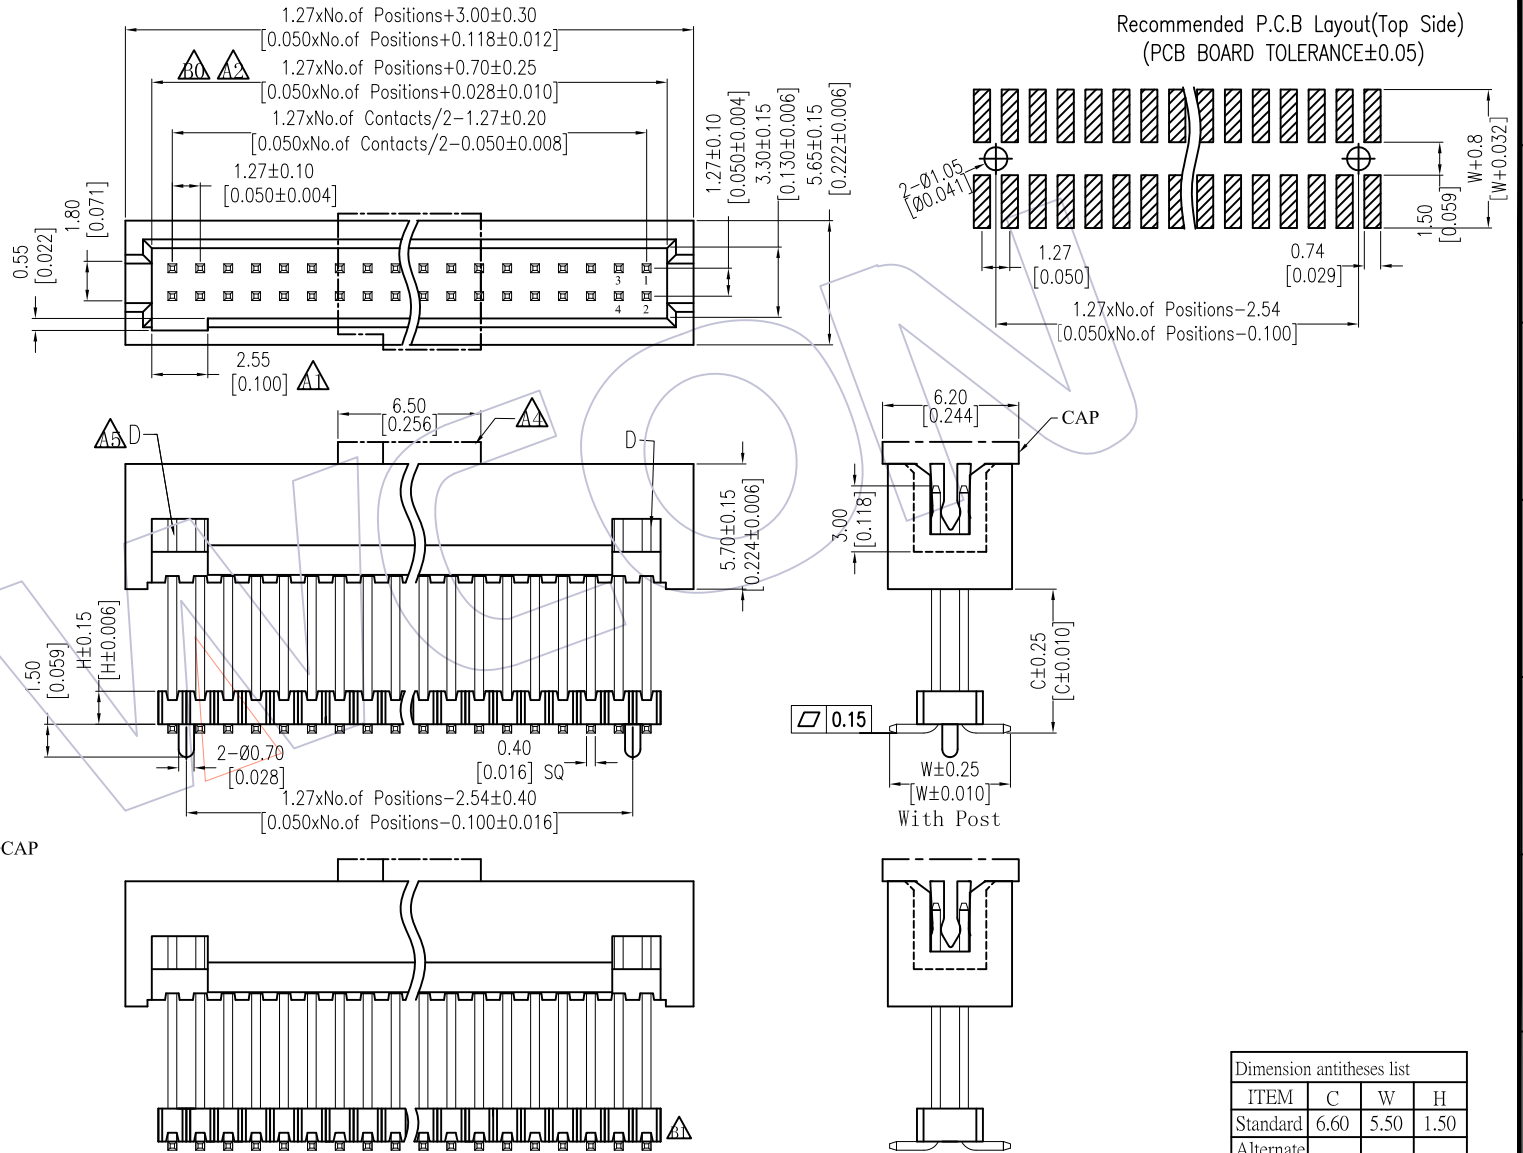

ITEM	C	W	H
Standard	6.60	5.50	1.50
Alternate			

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.
B1	2017/01/09	Modify	△	OPERATION	Ding	2017/01/09	1:1	3131-XXMXXBD00TX△
B0	2016/11/14	Change Dimension	△	X.X ±0.40	CHECK	DATE	UNIT mm	TITLE:
A5	2013/09/27	Modify	△	X.XX ±0.25	APPROVE	DATE	SIZE A4	1.27 BOX HEADER SMT
A0	2008/04/25	NEW	—	X.XXX ±0.15			SHEET 1/1	H=5.70 ADD HOUSING
				Angle ± 3'			PROJ.	Customer NO.
				DIM TOL				

WCON
 Http: www.wcon-china.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon-china.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: wconks@wcon-china.com